

Technical Information


DODECAHEDRAL LOUDSPEAKER DO 12

Applications:

- Measurement of Reverberation Times
- Measurement of Sound Insulation
- Measurement of Sound Absorption

Features:

- High Sound Power
- Good Directivity

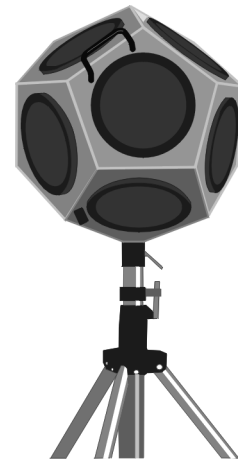

Technical Data:

Rated Power:	600 W
Impedance:	$\approx 8 \Omega$
Sound Power:	>120 dB with wide band Excitation (100 Hz - 4 kHz)
Frequency Range:	80 Hz - 6,3 kHz
Directivity:	nearly spherical, acc. to DIN 52210
Dimensions:	$\approx 400^{\circ}$ mm
Weight:	15 kg
Weight Tripod:	8 kg
Connector:	4-pol. Speakon-Connector (Neutrik) Pin 1+ / 1-